

Jack Cat6A Shielded SS

PART NUMBER: JK-C6ASH-SS



TRANSMISSION PERFORMANCE

MEET ALL REQUIREMENTS SPECIFIED IN CONNECTING HARDWARE REQUIREMENT OF ANSI/TIA-568-C.2 CAT. 6A

ELECTRICAL

ELECTRICAL INSULATION RESISTANCE: 500M MIN. @ 100V D.C.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V D.C. OR A.C. PEAK CONTACT TO CONTACT @ 60HZ FOR 1 MINUTE, 1500V D.C. OR A.C. PEAK CONTACT TO PANEL @ 60HZ FOR 1 MINUTE

MECHANICAL

INSERTION/EXTRACTION LIFE: 750 CYCLES MINIMUM
IDC WIRE GAUGE: 22 ~ 24 AWG

PHYSICAL

HOUSING: ZINC-ALLOY FULLY SHIELDED
SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50 MICRO-INCH OF GOLD.






IDC: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH 100% Sn ALLOY

TOLS.

~ 20 MM: +/- 0.2MM
OVER 20 MM TO 60 MM: +/- 0.4MM
OVER 60 MM: +/- 0.8MM
ANGLES: +/- 1 DEGREE

ITEM	PARTS DESCRIPTION	QTY.
1	JACK HOUSING	1
2	GROUNDING	1
3	INSERT MODULE	1
4	IDC MODULE	1
5	WIRE CAP	1
6	JAW	1
7	CLIP	1
8	WIRING LABEL	2

ASSEMBLY DIMENSION

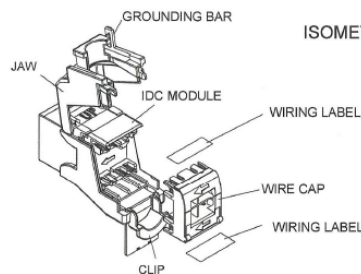

ISOMETRIC VIEW

